


RICOH AFICIO GX7000 GELSPRINTER




SETUP INSTRUCTIONS: RICOH AFICIO GX7000 GELSPRINTER

ChromaBlast Driver Installation


1. Open the printer box, remove the cables and other accessories, and place them aside. Enlist the help of someone (the printer weighs approximately 43 lb) to remove the printer from the box, and place it on a sturdy work surface with sufficient operational clearances.

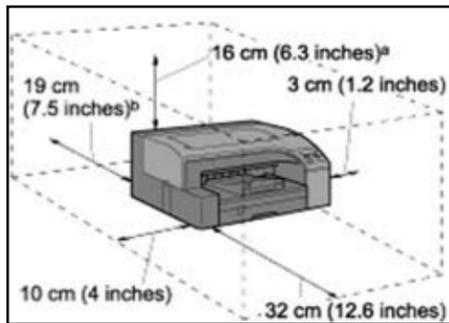


2. Remove the orange adhesive tape, attach the power cord and the USB cable, but **do not power on the printer at this time.**

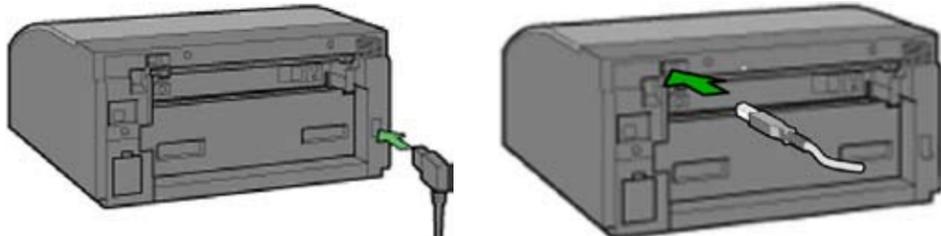


3. Remove the ChromaBlast™ R ink cartridges from their packages. Open the right front cover on the printer, and insert the cartridges in the order indicated—from left to right (as you face the printer): black (K), cyan (C), magenta (M) and yellow (Y). Press each cartridge in until it engages securely, and close the cover once all of the cartridges are in place. Never shake or agitate the cartridges.

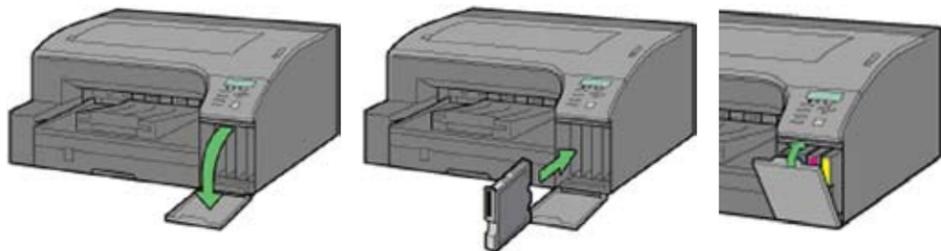

4. Remove the paper tray, pull the cover straight up, and adjust the guides for the paper size you will be using. Load the paper, put the cover back on, and reinsert the tray into the printer.

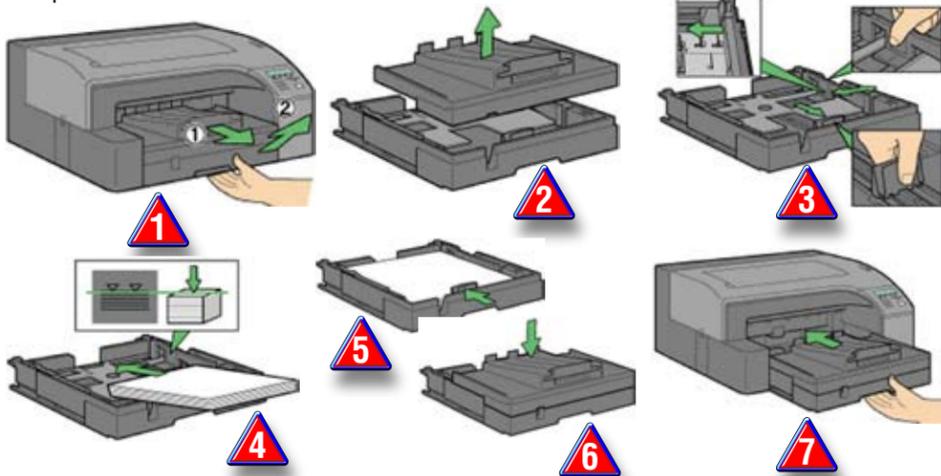

5. Plug the power cord into a power outlet, and the USB cable to your computer, but **do not turn on the printer yet.**

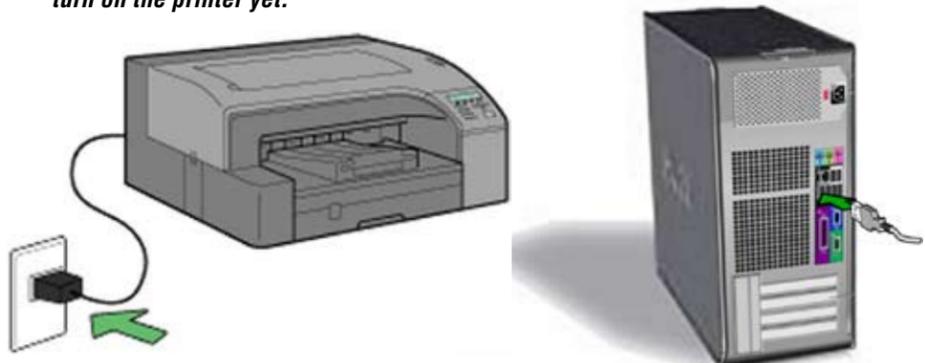

6. Start your computer, wait until Windows is fully operational, and then insert the Ricoh CD in the CD-ROM drive. The CD contains the printer driver, and the program will start automatically. Follow the on-screen instructions, beginning with the selection of the language.

7. Proceed to the installation of Chromablast™-R Driver.


1. Visit the **Sawgrass Technologies** web site at www.sawgrassink.com and navigate to the **Download ChromaBlast Drivers** page (Begin by highlighting **Technical Support**, then highlight **ChromaBlast Technical Support**, then **ChromaBlast Downloads**, and finally highlight and click on **Download ChromaBlast Drivers**) (see graphic below).





2. In the **Download ChromaBlast Drivers** window that opens, click on the name of your printer that is associated with your operating system, and save the file to your desktop. The file name and graphic will resemble **GX7000CB_v2.8.6.exe** (see illustration at right).



3. On your desktop, double-click on the name of the file you just downloaded and click **Next** on the welcome window to advance to the **License Agreement Window**. Click on **I Agree** to continue with the installation. Refer to the illustrations below.

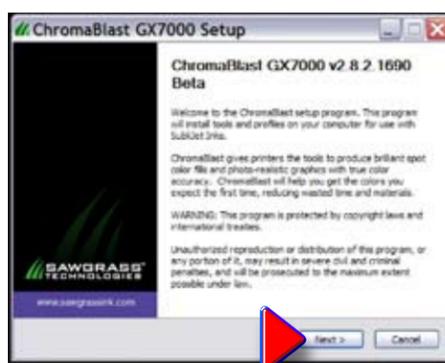

4. Click **Next** on the **Choose Components** window to move to the **Choose Install Location** window. Here, click **Install**, unless you wish to change the location on your drive where you wish to install this program. In this case, click **Browse**, select the location, then click **Install**.

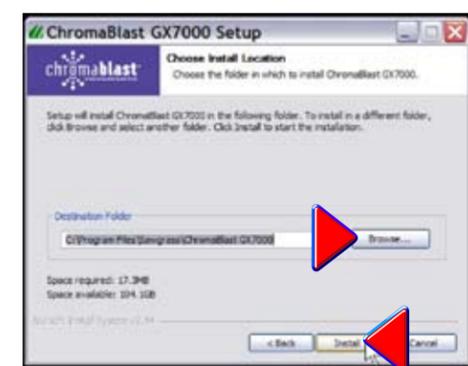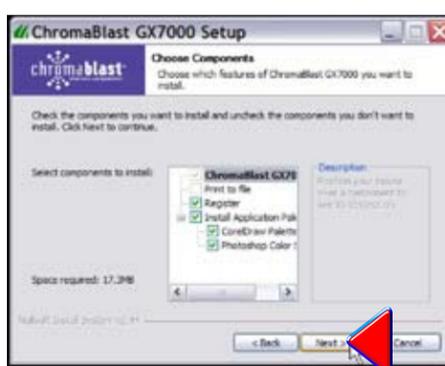


5. Once you click **Install**, you will see the installation progress bar, while a window will open to warn about the software not passing **Windows Logo Testing** (see illustrations below). Ignore this warning, click **Continue Anyway**, and continue with the installation.



SETUP INSTRUCTIONS: (CONTINUED)



6. As installation nears completion, a new window will prompt you to register your product (see illustration below left). Do not skip this step, as registration is required to unlock the full functionality of the software. Click **Click Here to Obtain Registration Code**.

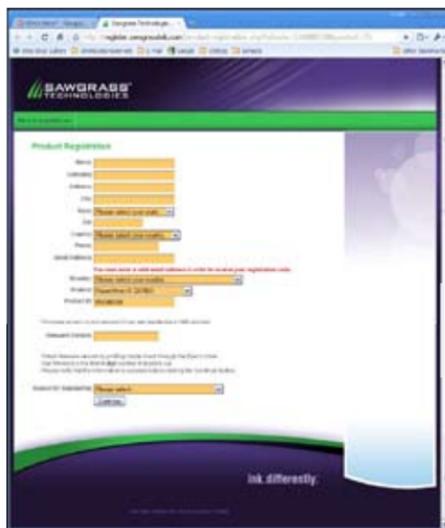

7. Follow the prompts to go on line, fill in the required information and obtain the registration code (see illustration above right). However received, copy the number provided into the blank **Registration Code** space, and click **Apply Code** (see below left).



8. The registration process is now complete (see upper right), and the installation program warns you to disable the color management elements in your graphics software. Click Continue to proceed.

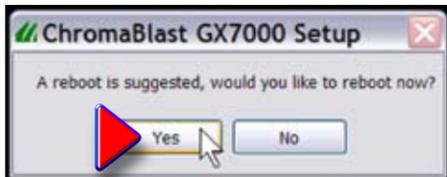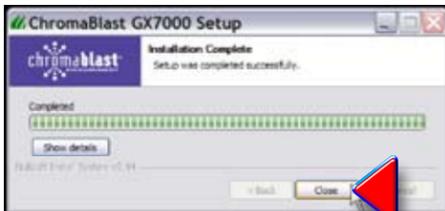

9. This (above left) window indicates that the loading process has completed successfully.

10. The ChromaBlast GX7000 Setup window (above right) gives you the option of rebooting your computer. Close all other open applications, and click **Yes** to restart (**reboot**) your computer to complete the installation process.

NOTE: For the **absolute latest** Information and Updates on all Products, Materials, Processes, and/or Procedures relative to all offerings by or through Sawgrass Technologies, Inc., please refer to our Website: www.sawgrassink.com.